

Bracebridge Transit 'Ride the Wave' bus is equipped with a bike rack which can accommodate 2 bicycles. Passengers may secure their bicycles for no additional charge. This service is for non-motorized, two-wheel bicycles only with a wheel diameter between 20-29 inches (700c), up to a 44 inches wheelbase and maximum tire width of 2.3 inches. The weight of the bicycle cannot exceed 55 pounds. It is the rider's responsibility to load and unload the bicycle from the bike rack. For safety reasons, Bracebridge Transit bus operators are not permitted to leave the bus to assist passengers with the loading and unloading of bicycle.

LOADING


- 1 APPROACH**
Before the bus arrives, remove any non-permanent fixture such as bottles or pumps. Indicate to the bus operator that you wish to load your bicycle.



- 2 OPEN**
Following the directions on the bike rack. Squeeze and hold the handle to release the bike rack and slowly lower it down without dropping.



- 3 LOAD**
Lift your bicycle onto the bike rack. Fit the wheels in the front and rear slots as indicated on the bike rack.

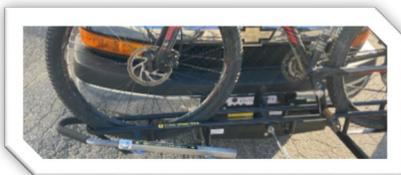

- 4 SECURE**
Pull the support arm hook out, up and over the front tire to secure your bicycle. The support arm hook must be between the highest point of the tire and the head tube.




UNLOADING


- 1 APPROACH**
Advise the driver you are unloading your bicycle. Pull the support arm hook up, out and over the front tire to release the bicycle.



- 2 UNLOAD**
Lift your bicycle out and away from the bike rack.

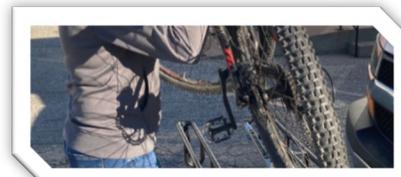

- 3 FOLD**
Raise the bike rack into the upright position, if no other bicycles are loaded.

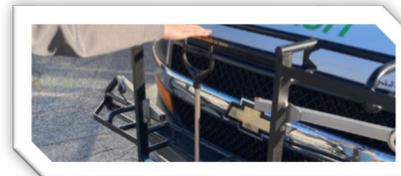

- 4 STEP AWAY**
Step away from the bus onto the curb, and signal to the driver that you are clear of the bus. Once the bus has passed, continue on your bicycle journey.

